




LOW PASS FILTER


PART NO: AE/LC/LPFB72C4B1210M

Center Frequency	:	1210 MHz
Insertion loss	:	<1.5 dB
Rejection @1535 MHz	:	>25 dB
Return loss	:	>12 dB
Operating temperature range	:	-40°C to +85°C
Power handling	:	1Watt
Package	:	SMD
Size	:	25.4x12.7x9.00 mm (approx)


Drawing:

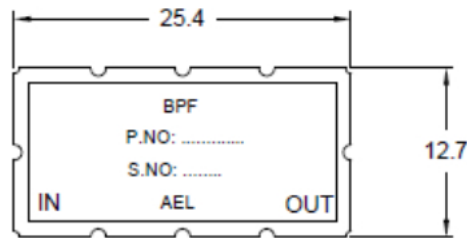


TOP VIEW

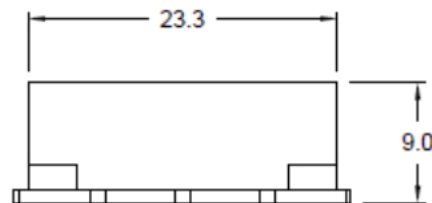

FRONT VIEW



SIDE VIEW

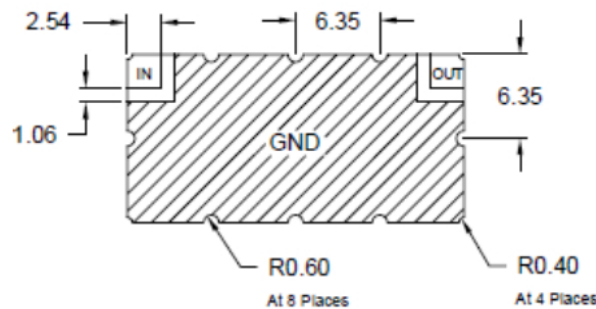

BOTTOM VIEW

Andhra Electronics Pvt. Ltd.

Plot No.: 34 & 35, IDA,
Kakinada-533 005
Andhra Pradesh, India
URL: www.andhraelec.com

Phone: +91 884 234 2203
Fax: +91 884 234 1145
e-mail: info@andhraelec.com




Response plot:



Trc1 S21 dB Mag 10 dB / Ref0 dB Cal int
Trc2 S11 dB Mag 10 dB / Ref0 dB Cal int

1

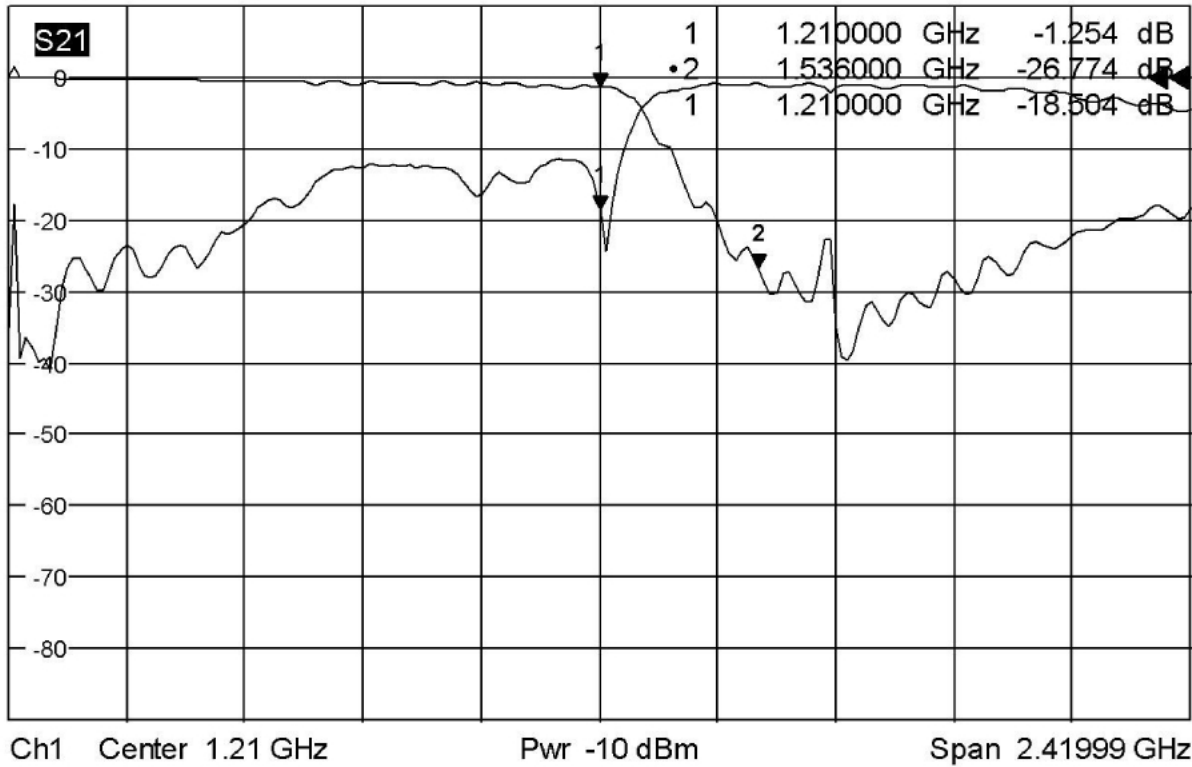

Date: 19.NOV.2013 12:41:02

Preliminary Data sheet for 1210 MHz LPF

Revision: 00/13

Andhra Electronics Pvt. Ltd.

Plot No.: 34 & 35, IDA,
Kakinada-533 005
Andhra Pradesh, India
URL: www.andhraelec.com

Phone: +91 884 234 2203
Fax: +91 884 234 1145
e-mail: info@andhraelec.com