



Data Sheet

S & C-BAND MULTICOUPLER

Part NO. :AE/MC/3050/1500S

Specifications:-

- Frequency Range : 2200-5250 MHz
- Gain : 0 ± 2 dB
- Overall Gain Flatness : ± 1.0 dB over the band
- Input Signal Level : Noise Level to +10 dBm max.
- Noise Figure : <10 dB
- Isolation output to output : >40 dB
- Isolation output to input : 60 dB min.
- Impedance : 50 ohms
- Input & Output VSWR : 2.0:1
- RF Input : 1 N(F)
- RF Output : 16 N(F)
- MTBF : 50,000 Hours min.
- Supply Voltage : 180 V AC TO 260 V AC/50 Hz, C13 Socket
- Size : 2U Rack STD
- Operating Temperature : 0 to +55°C




S & C-Band Multicoupler

SL No.: 01-2025

Part No.: -AE/MC/3050/1500S

Image:

Front View:

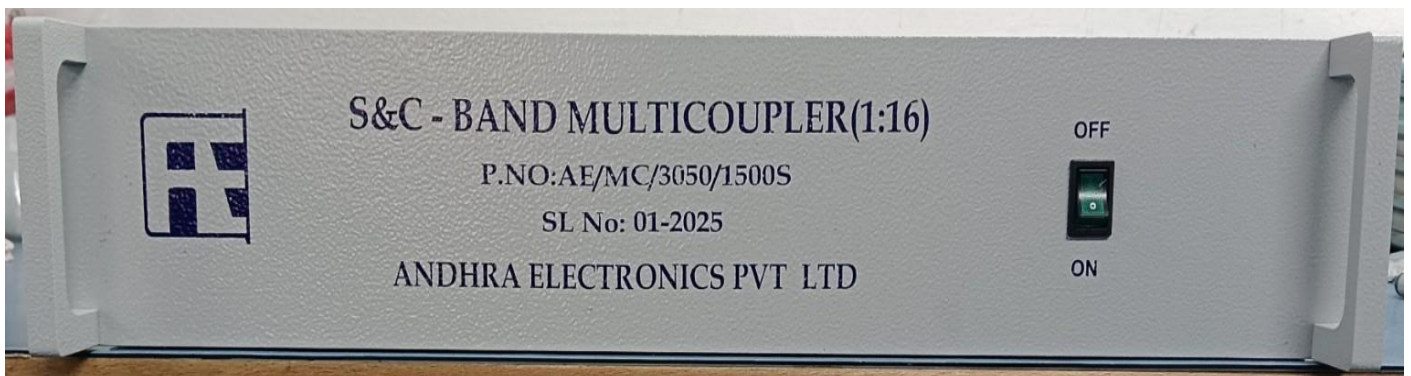

Back View:

