




Preliminary Data Sheet

Product: Crystal Filter

ELECTRICAL SPECIFICATIONS:

Centre frequency(f_c)	:	5MHz to 100MHz
Insertion loss	:	<6dB
No Poles	:	up to 8
Bandwidth@3dB	:	± 25.0 KHz
Input /Output Return Loss	:	12dB(min)@ f_c
Operating temp range	:	-20°cto +70°c
Storage temp range	:	-40°cto +85°c
Input Output Impedance	:	50 Ω
Maximum input power level	:	0dBm (Higher power levels optional)
Size	:	38.4mmx18.2mmx13.5mm(to ± 0.2 mm)

MECHANICAL DIMENSIONS:

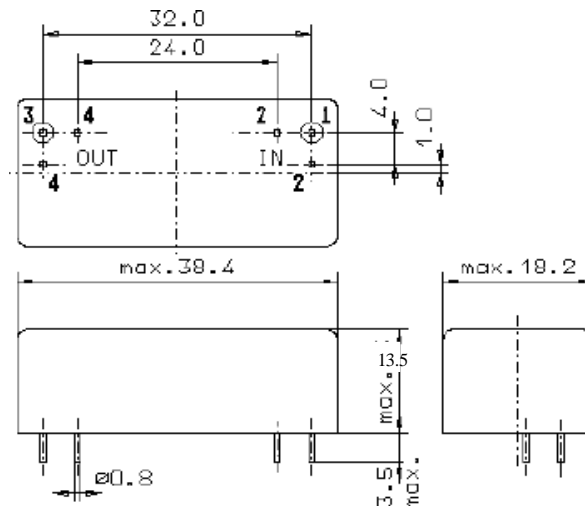

Revision:00

Date of issue: May/26

TY SYSTEM CERTIFIC

Andhra Electronics Pvt. Ltd.

Plot No.: 34 & 35, IDA,
Kakinada-533 005
Andhra Pradesh, India
URL: www.andhraelec.com

Phone: +91 884 234 2203
Fax: +91 884 234 1145
e-mail: info@andhraelec.com