



BAND PASS FILTER

PART NO: AE.BPF.2/10

Centre frequency : 2 MHz

Insertion loss : <3 dB

1 dB band width : 1 MHz

Ripple in pass band : <1.0 dB (peak to peak) Return loss over the pass band : >10 dB

Stop band attenuation @1.35 MHz : 20 dB

Stop band attenuation @2.75 MHz : 30 dB

Operating temperature range : -20°C to +70°C


Storage temperature : -30°C to +85°C

Maximum Power level : +10 dBm


Package : SMD

Size : 55x17x12.7 mm

Drawing:

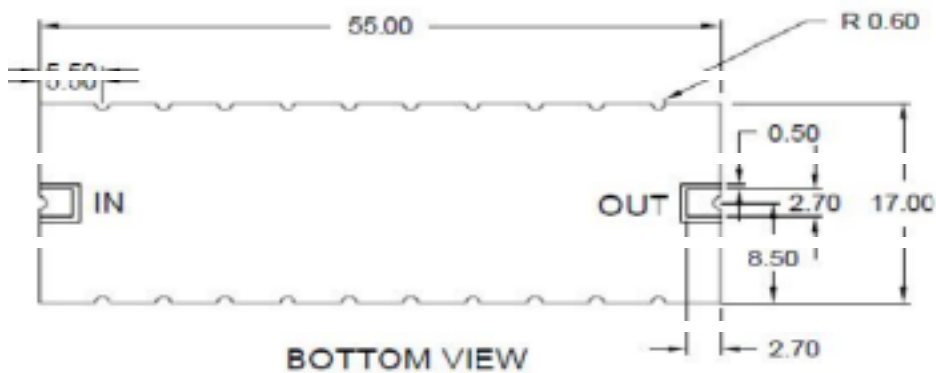

TOP VIEW WITH COVER

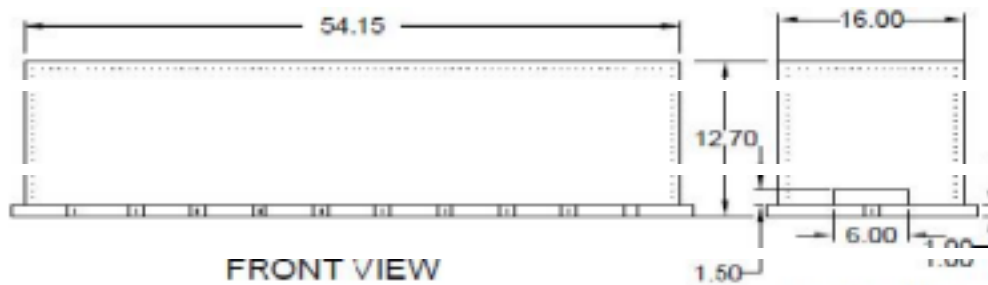

FRONT VIEW

SIDE VIEW

Andhra Electronics Pvt. Ltd.

Plot No.: 34 & 35, IDA,
Kakinada-533 005
Andhra Pradesh, India
URL: www.andhraelec.com

Phone: +91 884 234 2203
Fax: +91 884 234 1145
e-mail: info@andhraelec.com