



BAND PASS FILTER


Product: 3-4 MHz LC BAND PASS FILTER

Part. No: AE/LC/BPFA43BCD3.5/1M

1. Electrical Specifications:

	:	3.5MHz
Center frequency (Fc)	:	<3.0 dB
Insertion loss	:	>Fc±500kHz
Band width @ 1dB	:	>10 dB
Return loss@ Fc	:	>15 dB
Stop band attenuation Fc±1 MHz	:	>70 dB
Alternate attenuation	:	-20°c to +70°c
Operating temp range	:	
Impedance	: :	50 +10dBm
Maximum power level	:	SMD
Package	:	38.1X12.7X12.7mm (Approx)

2. Mechanical Dimensions (Optional):

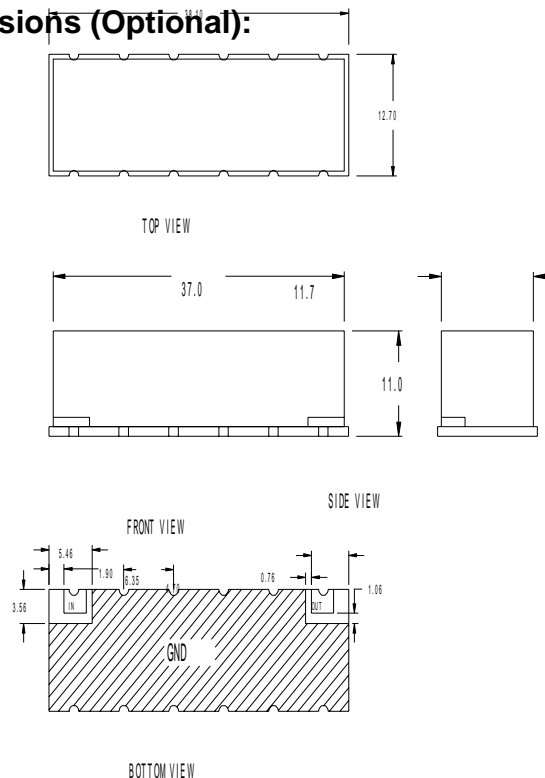

AE/PDS/253

Revision:00

Date of issue:DEC/15

Andhra Electronics Pvt. Ltd.

Plot No.: 34 & 35, IDA,
Kakinada-533 005
Andhra Pradesh, India
URL: www.andhraelec.com

Phone: +91 884 234 2203
Fax: +91 884 234 1145
e-mail: info@andhraelec.com