




## LOW PASS FILTER


PART NO: AE.LPF.1.7

Cutoff frequency : 1.7 MHz  
Insertion loss : <1.5dB  
Rejection @2.5 MHz : 20 dB  
Return loss : >10 dB  
Operating temperature range : -40°C to +85°C  
Power Handling : 1Watt  
Size : 38.1x12.7x12.7 mm Package : SMD

### Drawing:

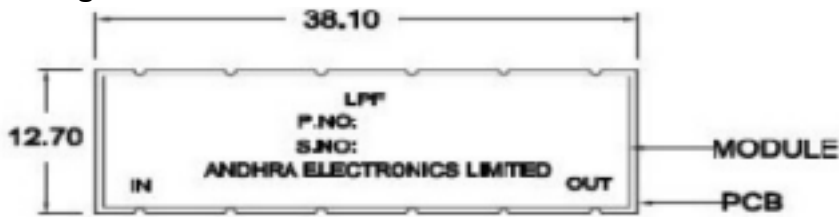


TOP VIEW

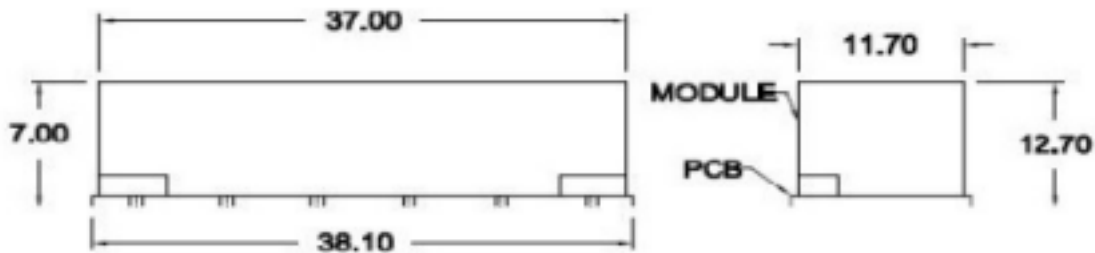

FRONT VIEW

SIDE VIEW

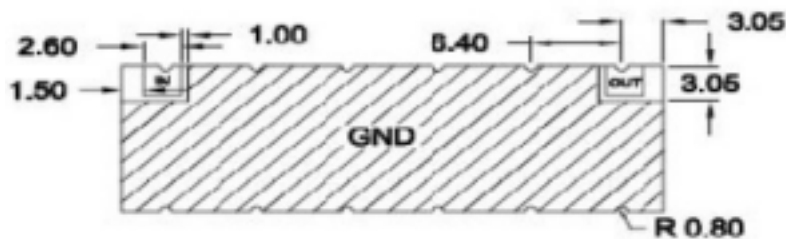

BOTTOM VIEW


Andhra Electronics Pvt. Ltd.

Plot No.: 34 & 35, IDA,  
Kakinada-533 005  
Andhra Pradesh, India  
URL: [www.andhraelec.com](http://www.andhraelec.com)

Phone: +91 884 234 2203  
Fax: +91 884 234 1145  
e-mail: [info@andhraelec.com](mailto:info@andhraelec.com)




## LOW PASS FILTER

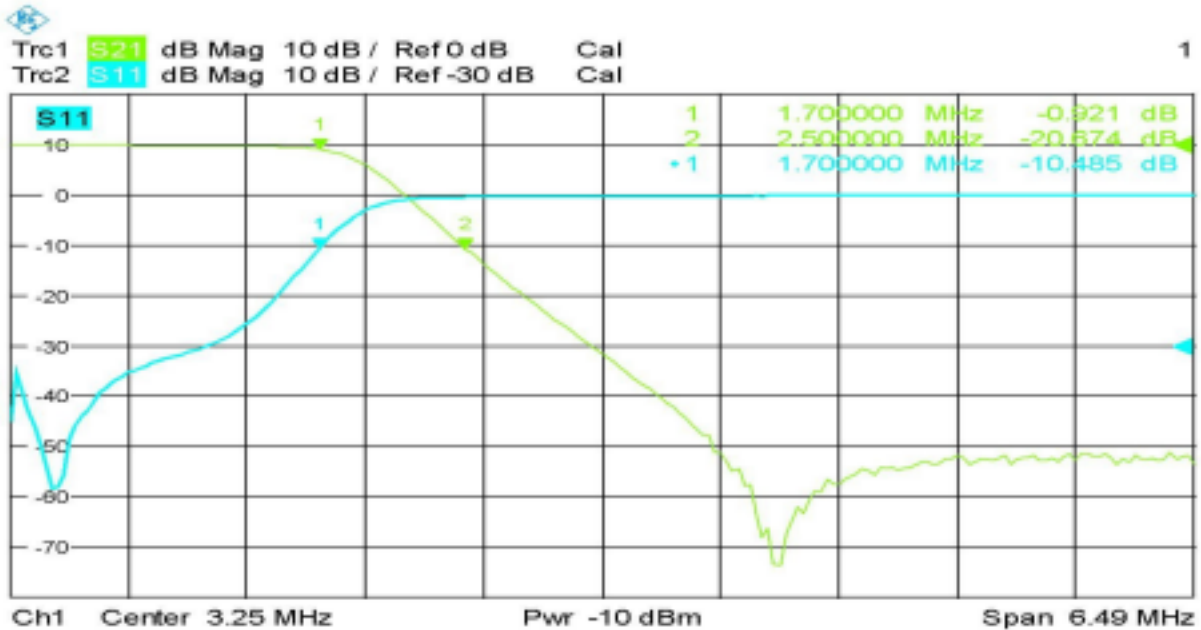

700

Date: 5.JAN.2013 07:28:59

### Group Delay:

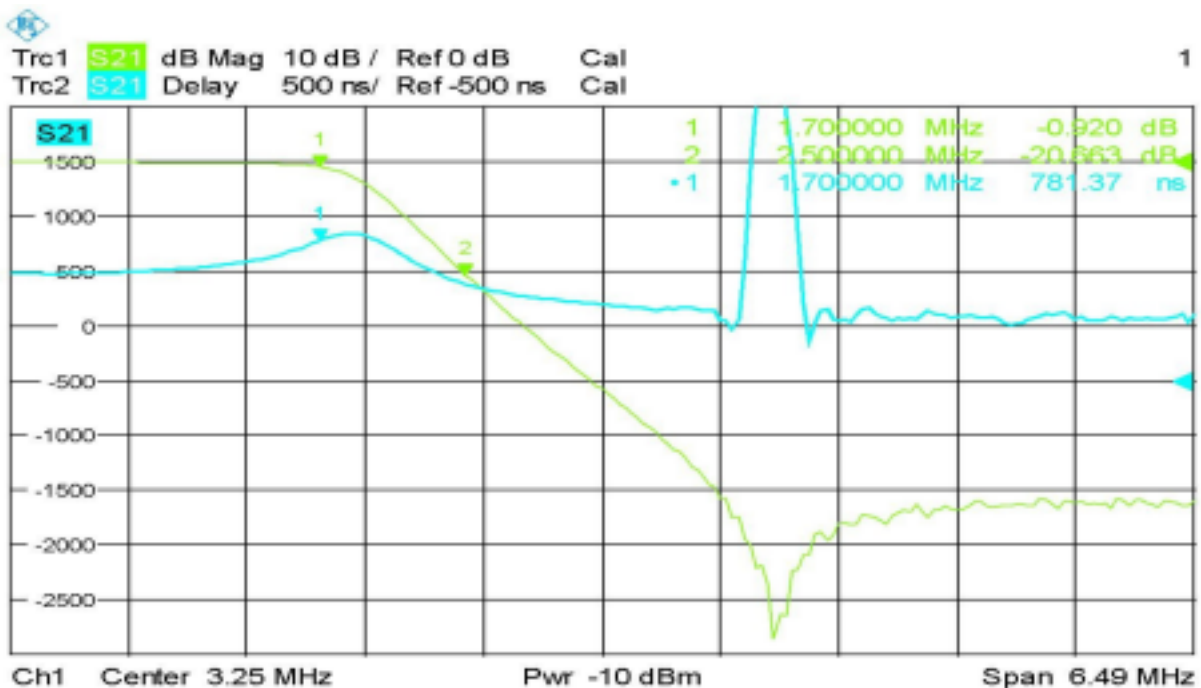

700

Date: 5.JAN.2013 07:29:32

Andhra Electronics Pvt. Ltd.

Plot No.: 34 & 35, IDA,  
Kakinada-533 005  
Andhra Pradesh, India  
URL: [www.andhraelec.com](http://www.andhraelec.com)

Phone: +91 884 234 2203  
Fax: +91 884 234 1145  
e-mail: [info@andhraelec.com](mailto:info@andhraelec.com)