




LOW PASS FILTER

PART NO: AE.LPF.30/C

Cut off frequency (Fc)	:	30 MHz
Insertion loss	:	<1 dB
Return loss	:	>12 dB
Rejection @ 40 MHz	:	>35 dB
Rejection @ 45 MHz	:	>50 dB
Operating temp range	:	-30°C to +70°C
Impedance	:	50 Ω
Package	:	Connector version
Size	:	25X25X13.80 mm (approx)

DRAWING:

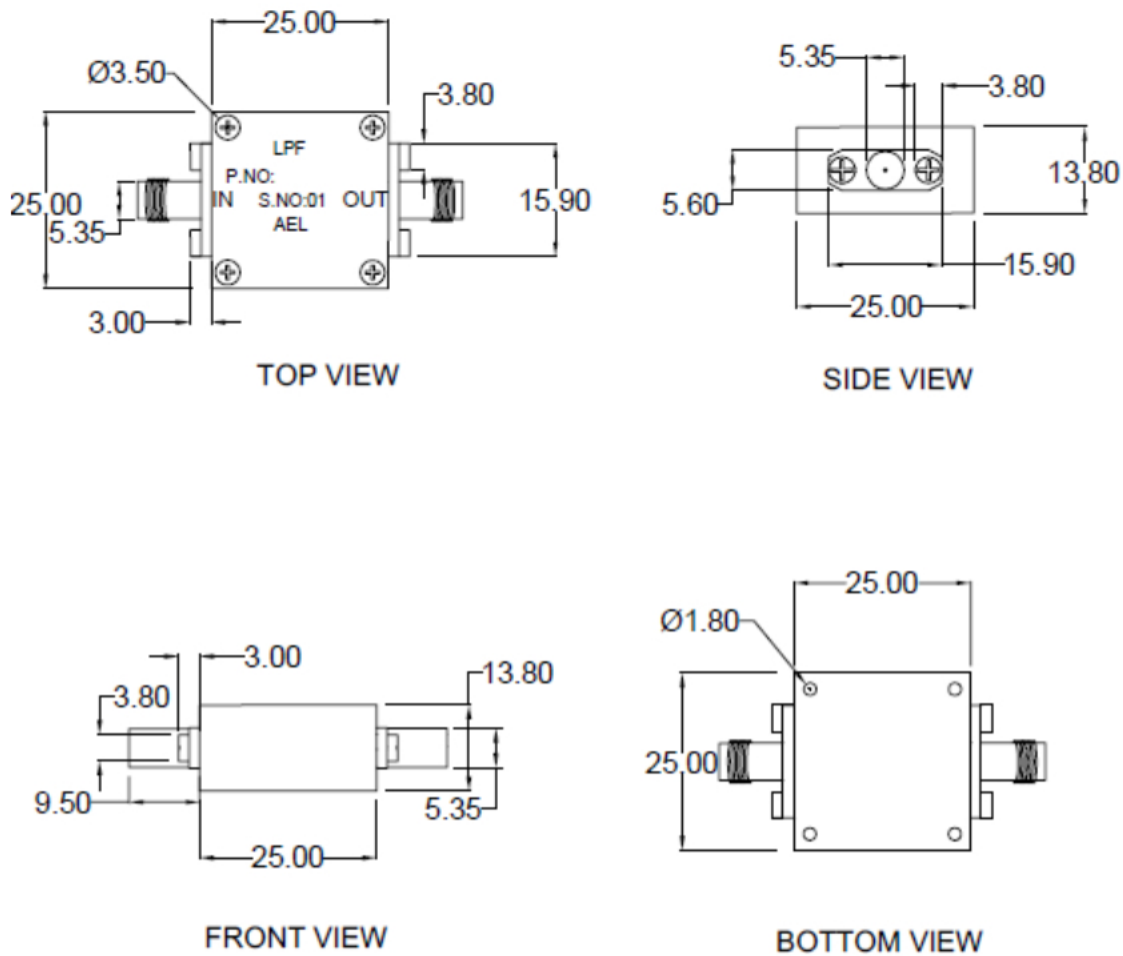


Andhra Electronics Pvt. Ltd.

Plot No.: 34 & 35, IDA,
Kakinada-533 005
Andhra Pradesh, India
URL: www.andhraelec.com

Phone: +91 884 234 2203
Fax: +91 884 234 1145
e-mail: info@andhraelec.com



Response plot

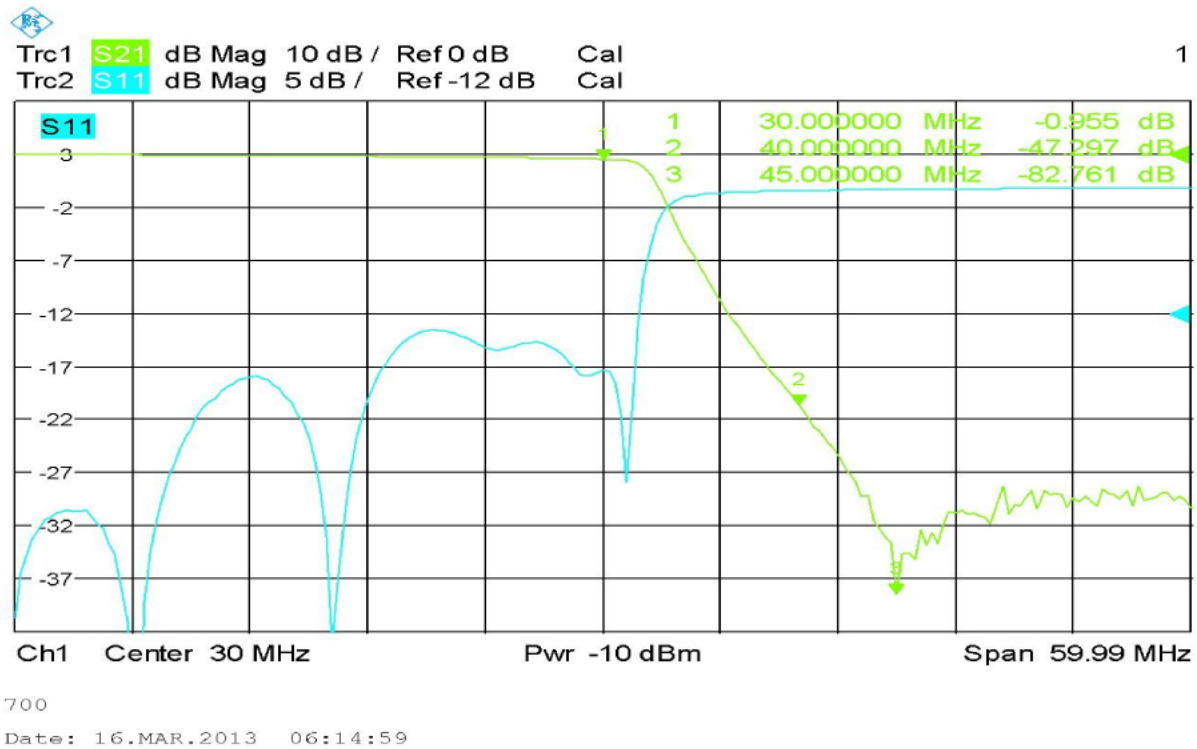

REVISION:00/13

Andhra Electronics Pvt. Ltd.

Plot No.: 34 & 35, IDA,
Kakinada-533 005
Andhra Pradesh, India
URL: www.andhraelec.com

Phone: +91 884 234 2203
Fax: +91 884 234 1145
e-mail: info@andhraelec.com